



Information for Road Design

Parallel Parking

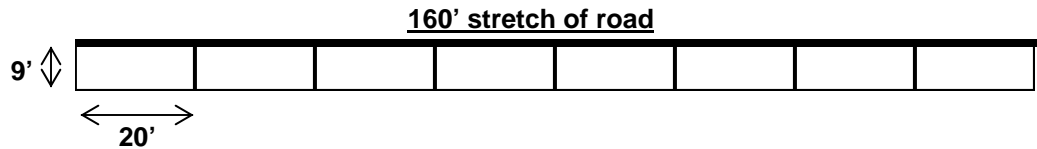

Angled Parking (30°)

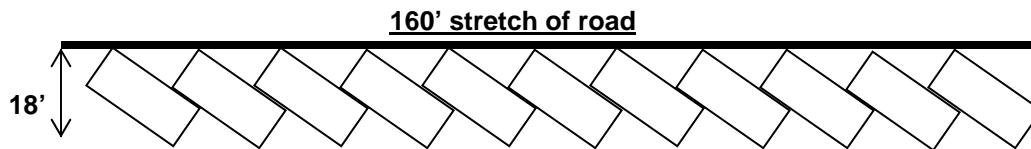

Bike Lanes

◆ Minimum of 5' required for a bike lane

****You can have parking and a bike lane together, so long as all minimum measurements are satisfied.*

Criteria:

For a one-mile stretch of road, the goal is to have:

- a minimum of 600 parking spaces (combined total for both sides)
- a minimum of 1/2 mile of biking lanes (combined total for both sides)